


Customer/Name: \_\_\_\_\_

Date: \_\_\_\_\_




- Rod Diameter: **3/8" 7/16" 1/2" 5/8" Other**
- Overall Belt width including outer most bulge (Inches) : \_\_\_\_\_
- Number of belts & Belt Sizes: **2x60mm 3x60mm 2x75mm 3x75mm Superflex Other**  
If Other explain: \_\_\_\_\_


4. Type of Belting (Standard Profile most common): **Standard DP HP EHP DEHP WB**

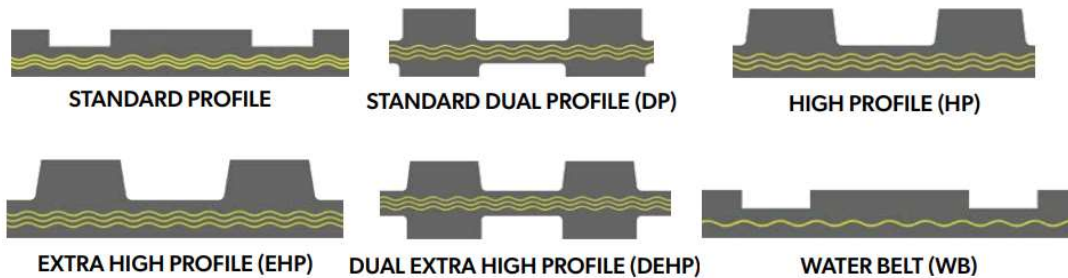

5. Center Style: **Standard 32mm Superflex P-Clip Staggered**



6. Pitch (mm): \_\_\_\_\_  
Common Sizes (mm): 28, 32, 36, 40, 42, 45, 50, 56  
60, 64, 84, 120, 150, 180

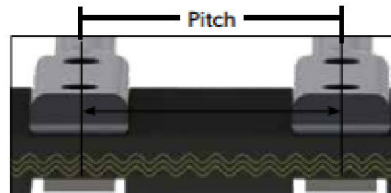

7. Total Number of Links (Including master rod) or total length of belt: \_\_\_\_\_

8. Pattern: \_\_\_\_\_  
Reference any straight, up, or down rods. Also include rod coverings or flights. Send pictures if not clear.  
Examples: 2 down straight plain - 1 straight plain  
6 down with soft rubber tubing - 1 up with cushion cell 1.63  
5 straight cflex with ears - 2 peg  
6 straight plain - 1 rubber molded flight 3.5" tall no ears

9. Joining Method: **Threaded Clips Lap Joint (# of pitches) Skive Joint (# of pitches) Endless**



Other joining method options: **Master-Pin Master Nut & Bolt Bolt-on Clips (non threaded)**

Notes: All webs will have standard 1.25" sprocket run unless otherwise specified.